

KMAY32 MODULE TO CONNECT DETECTORS/ALARM CALL POINTS

Module for connecting conventional detectors and alarm call points

Microprocessed and algorithmic-addressable module (with short-circuit insulator) which is installed as one more element in the loop.

This module allows the connection of conventional detectors and/ or alarm call points in an algorithmic-addressable fire detection system, performing the interface function between an algorithmic-addressable control panel and a conventional system. Up to a maximum of 10 conventional alarm call points can be installed on the strip of "Area C". The "D Area" strip allows a maximum of 32 temperature detectors (A50, A30X range) or 32 components between smoke detectors (A50, A30X range) and conventional alarm call points. Both strips supervise the line using a 4K7 end-of-line resistor. It thus indicates the status of the open line, crossed line, detector alarm or alarm call point alarm.

It has a microswitch for setting the area thresholds;


- Open line threshold (pin microswitch 1-2).
- Detector alarm triggered threshold (pin microswitch 3-4).
- Alarm call point triggered threshold (pin microswitch 5).

The blinking of the red transparent LED indicates communication with the control panel, and if it stays on in indicates the status of the alarm of a detector or of a alarm call point connected to that module.

This module has an output for the activation of a remote pilot, which is activated when it is in alarm state.

This module is powered by the loop connection and requires a 24V auxiliary power supply to power the areas, said voltage is supervised by the microcontroller.

Rectangular boxes made of heat-resistant ABS are available on order.

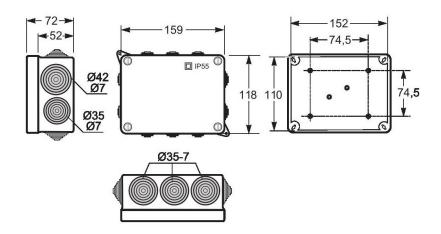

TECHNICAL FEATURES			
Module power supply	loop 24 - 35V with polarity	Activation indicator	Red led (fixed)
Auxiliary 24V power supply	20 - 30V	Communication indicator	Red led (blinking)
Standby consumption	1,5mA	Humidity	20 - 95% RH
Short-circuit isolator	Yes	Temperature	-10°C - +50°C
Area voltage	22V with polarity	Dimensions	159x118x72mm
Remote indicator output	Yes	IP protection	IP55



Compositor Wagner, 8 P.J. Can Jardí | 08191 Rubí | Barcelona | (+34) 935 862 690 | cofem@cofem.com | www.cofem.com

