



PUC-DR



PUC-PR

PUC-DR PUC-PR

EXTINGUISHER CALL POINTS

Simplified manual call points for extinguishing stop and triggering

Simplified manual call points for the shut-down and triggering of extinguisher systems using gaseous agents.

Every call point includes an action indicator (LED) that lights up if manually activated, in addition to a yellow tab that is triggered on the lower part of the drive face.



The call point is easily resettable by flipping the yellow switch on the front face.

PUC-PR model: Simplified manual call point for the SHUT-DOWN of EXTINGUISHER (blue) for use in conventional CLVR02EXT control panels.

PUC-DR model: Simplified manual call point for the TRIGGERING of EXTINGUISHER (yellow) for use in conventional CLVR02EXT control panels.

TECHNICAL FEATURES

Power supply	20 - 24V with polarity
Standby consumption	0mA
Alarm consumption	35mA
Activation indicator	Red led
Remote indicator output	No
Humidity	20 - 95% RH
Temperature	-10°C to +50°C
IP protection	IP50
Standard	EN 54-11

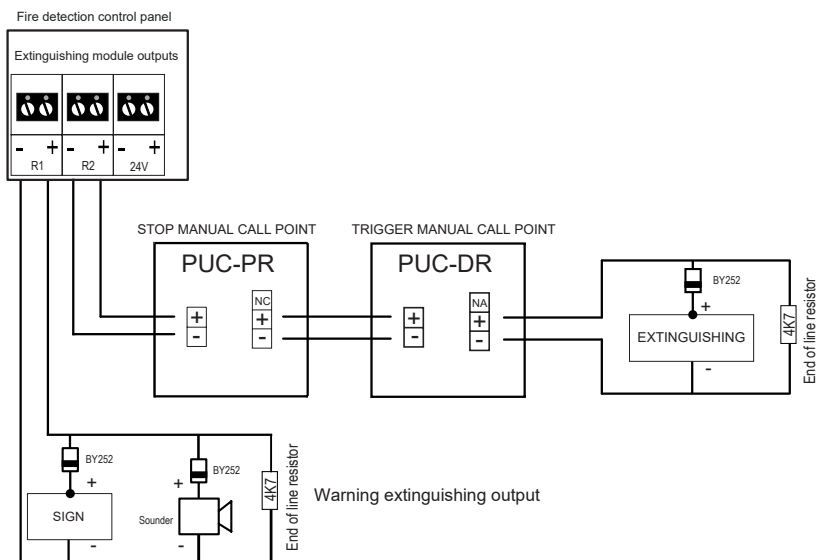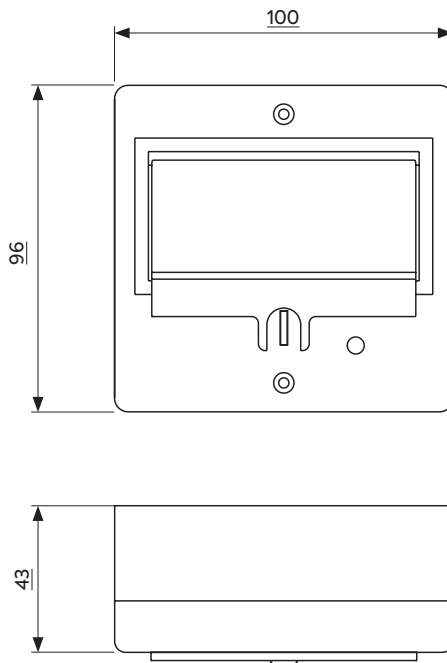

Wiring diagram