




Ø25 fire hose cabinet CR3X

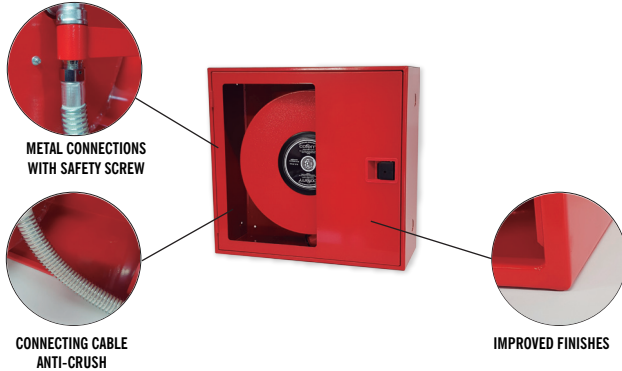

Fire hose cabinet Ø25 mm according to UNE/EN 671-1 and 20 m semi-rigid hose made according to UNE 694.

It is composed by:

Horizontal cabinet made of 1 mm thickness steel, painted in red color RAL3000, size 630 x 610 x 245 mm, with semi-blind door for polystyrene, and easy-open lock, provided with support arm fixing and pre-holes for water supply, including reel, hose, nozzle, swing arm, seat valve, manometer and supply hose.

It can be made in another color, with the RAL provided by the customer, or in stainless steel, and it can be mounted in a floor bow.

Likewise, under command, the door design has some options: standard, red blind, white blind, white semi-blind, totally stainless, etc.

There are the reference CR3XB, that mounts a glove valve with manometer outlet.

Features:

- Reel of Ø460 mm disks, painted in red, with axial supply.
- Semi-rigid hose Ø25 mm and 20 m length, manufactured according to EN 694 standard and CE mark.
- Hose nozzle of three positions: close, spray and jet, connected to the end of the hose by threaded prop.
- Arm red painted with double articulation and fixing strip to the cabinet bracket.
- Seat valve at 90° of 1", with 1/8" manometer outlet.
- Manometer graduated from 0 to 25 bars.
- Supply trigger between valve and reeling frame, with a Ø25 mm semi-rigid hose, with anti-crush spring.

