

Manual call point PUCAR




Manual call point for the conventional fire detection system.

It has an indicator of action (red led) that illuminates in case of be manually operated (alarm).

Features:

- Resettable call point by pushing yellow button on the front side.
- Transparent protector cover to avoid accidental false alarms.
- Immediate visual recognition of alarm status by the permanent activation of the LED, and the trigger of
- The yellow tab on the lower side of the activation face.
- According to EN 54-11 and CE mark according the European Regulation of Construction Products (UE) N°305/2011.

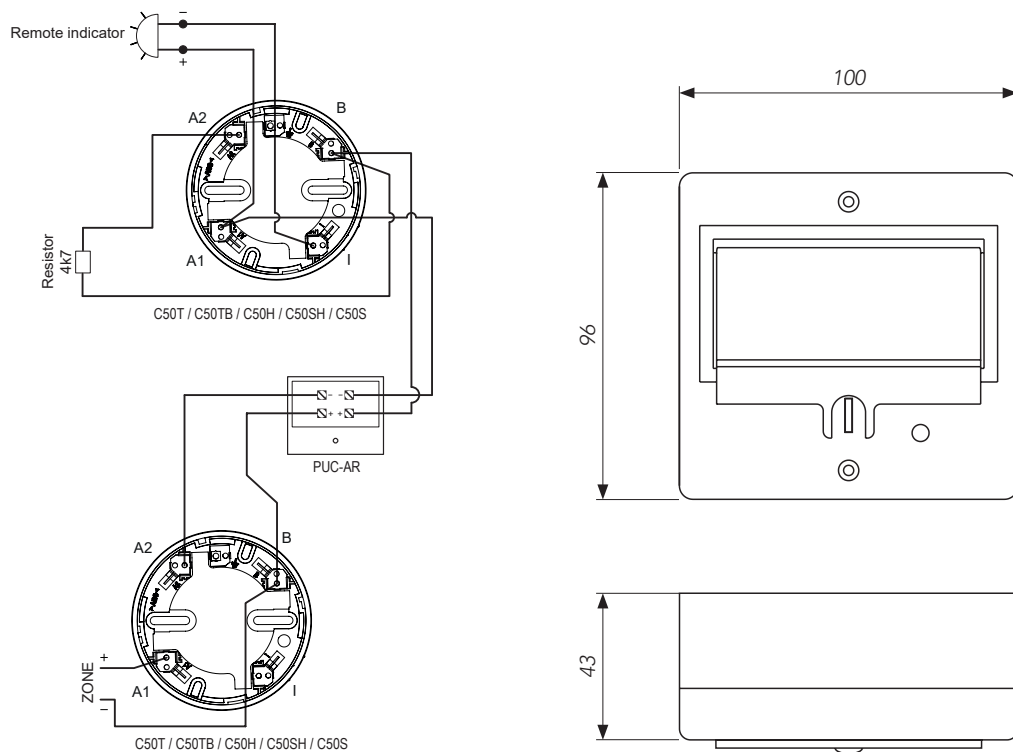

TECHNICAL FEATURES	
Supply	24-35V with polarity
Standby consumption	0mA
Alarm consumption	35mA
Activation signal	Red led
Remote indicator output	No
Humidity	20-95%RH
Temperature	-10°C +50°C
Standard	EN 54-11
IP protection	IP50