

Indoor and outdoor sounders

SIR24B / SIR24BL / SIR24B+BSLC / SIR24C




List of indoor and outdoor sounders to connect directly to the sounder output of the control panels or relay modules.

SOUNDER SIR24B, SIR24BL, SIR24BZA and BSLC

- Indoor and outdoor sounder made of red ABS.
- Great sound level. Low consumption.
- 32 selectable tones. Volume control.
- Automatic synchronization.
- SIR24B: Sounder.
- SIR24C: Sounder with light, certified EN54-23.
- SIR24BL: Sounder with light.
- SIR24BZA: Sounder with high base.
- BSLC: Base with light, certified EN54-23.
- All sounders have a diode incorporated.

TECHNICAL FEATURES	
Voltage range	9-28Vdc
Consumption using tone 3	at 24Vdc 16mA (SIR24B) 20mA (SIR24BL)
Consumption using tone 7	49mA (SIR24C)
Consumption tone 3 / 0,5Hz / high power	at 24Vdc 32mA (SIR24B+BSLC)
Output volume	at 24Vdc 102dB (A) (tone 3) SIR24C 107dB (tone 23)
Operative temperature	-25°C to +70°C
Dimensions	Ø95x91mm Ø95X107mm (SIR24BL/SIR24BZA) Ø95x95x135mm (SIR24BL+BSLC) Ø100X98mm (SIR24C)
IP protection	IP54 (SIR24B) IP65 (SIR24BL) IP65 (SIR24BZA) IP65 (SIR24B+BSLC) IP21C (SIR24C low base) IP65 (SIR24C high base)

SIR24B + BSLC SOUNDER

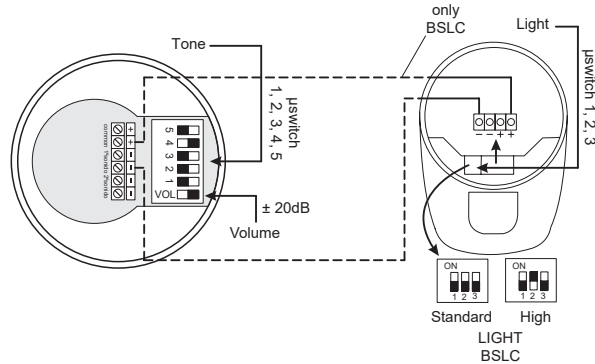

SIR24B, SIR24BL & SIR24BZA SOUNDERS

