



A30XZSLDR



A30XZSDDR

A30XZSLDR A30XZSDDR

ALARM DEVICES

Addressable alarm devices certified EN 54-23 and EN 54-3


Base with EN 54-23 visual alarm certified for A30X series, EN 54-3 sound certified and base detector.

There are 2 models available (detector not included):

- A30XZSLDR: A30XZ base with sound and light base, addressable.
- A30XZSDDR: A30XZ base with sound, addressable.

This device needs an addressable detector "with SIRD functionality" (standard detectors do not have this functionality) which will allow it to operate as a relay associated to this detector.

Typical uses of the A30XZSDDR and A30XZSLDR are spaces that require integrated fire detection equipment with sounder and visual alarm, such as hotel rooms fitted out for clients with hearing impairments, waiting rooms, nursing rooms, etc.

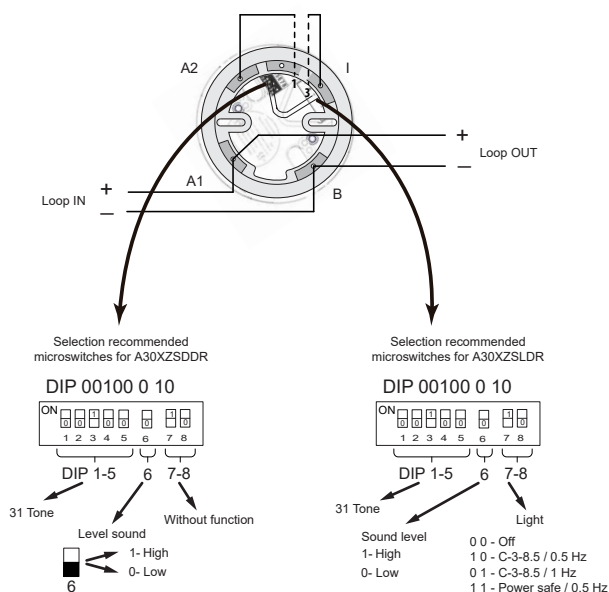

TECHNICAL FEATURES

	A30XZSDDR	A30XZSLDR
Power supply	18 - 30V with polarity	
Standby consumption	0mA	
Alarm consumption	5mA / 6mA (Low/High dB)	19mA / 20mA (Low/High dB)
Operative temperature	-10°C - +55°C	
Dimensions	Ø112x43mm (sin detector)	
IP protection	IP21C	
Sound intensity	Low 90 / High 96 dB - 1m	
Tones	31 types	
Standard	EN 54-3	EN 54-23 and EN 54-3
Flash	-	0,5Hz (60ms)