



C50ZSL



C50ZSD

C50ZSL C50ZSD

ALARM DEVICES

Conventional alarm devices certified EN 54-23 and EN 54-3


Base for C50 conventional detectors with EN 54-23 certified visual alarm base and EN 54-3.

Typical uses of the C50ZSL and C50ZSD are spaces that require integrated fire detection equipment with sounder and visual alarm, such as hotel rooms fitted out for clients with hearing impairments, waiting rooms, nursing rooms, etc.

There are 2 models available (detector not included):

- C50ZSL: D50 base with sound and light base, addressable.
- C50ZSD: D50 base with sound, addressable.

The coverage of the assembly should not exceed the coverage of the fire detector with which it is installed, unless there is a reason or use that justifies it.

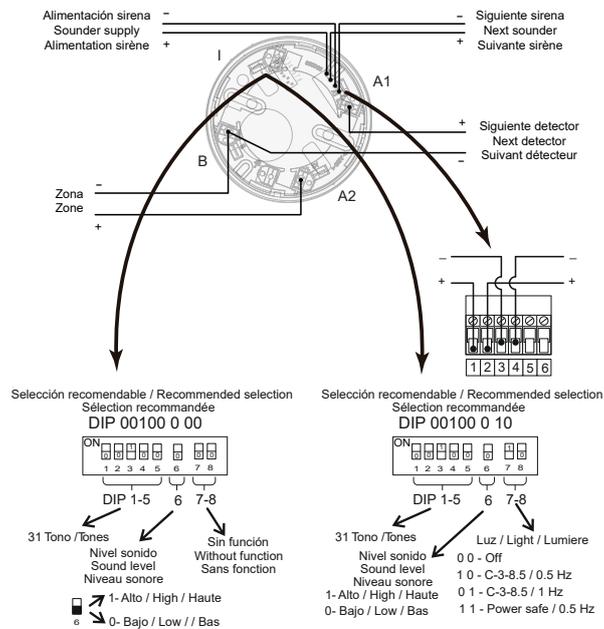

TECHNICAL FEATURES

	C50ZSD	C50ZSL
Supply		18 - 30V with polarity
Standby consumption		0mA
Alarm consumption	5mA / 6mA (Low/High dB)	19mA / 20mA (Low/High dB)
Operative temperature		-10°C - +55°C
Dimensions		Ø112x43mm (without detector)
IP protection		IP21C
Sound intensity		Low 90 / High 96 dB - 1m
Tones		31 types
Standard	EN 54-3	EN 54-23 and EN 54-3
Flash	-	0,5Hz (60ms)