



DAS1T



DAS4T

# DAS1T / DAS4T

## ASPIRE SMOKE DETECTOR


### Aspire smoke detector for fire protection installations

A range of aspirating smoke detectors .

They detect smoke by analysing the air sucked in through holes in tubes distributed around the room to be monitored and fed to this detector.

This aspiration detector uses the latest technology in detection, avoiding false alarms, particle recognition, greater stability, sensitivity and longevity.

Typical applications for this range of detectors are: Data storage rooms, air conditioning units, machine rooms, computer rooms, equipment grilles, prison cells, air ducts, etc.

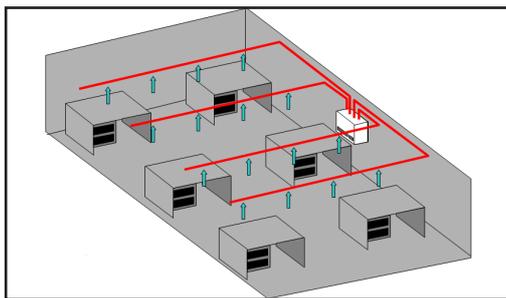

installation diagram

#### TECHNICAL FEATURES

	DAS4T	DAS1T
Supply	24V nominal	24V nominal
Consumption in alarm	7,8 - 9,6W	9,6W
Operating temperature	0 - 39°C	0 - 39°C
Humidity	10% - 95% (no condens.)	10% - 95% (no condens.)
IP protection	IP40	IP40
Dimensions	350x225x135mm	350x225x135mm
Standard	EN 54-20	EN 54-20