



PWS03Y/05Y

EXTERNAL POWER SUPPLY

External power supply for fire protection installations

External switched-mode power supply.


The PWS is offered installed inside a 424x330x160mm (with cover) , which provides additional space for the necessary batteries inside.

There are 2 models depending on the system's power requirements:

- PWS03Y: 3A (100W) supply capacity.
- PWS05Y: 5A (155W) supply capacity.

FEATURES

- Supply capacity of 3A (PWS03Y model) or 5A (PWS05Y model).
- PWS incorporated in a cabinet, which allows the necessary batteries to be installed inside it.
- Metallic cabinet.
- Incorporated battery charger
- Existing variant with black cabinet and grey door (PWS03 / PWS05).

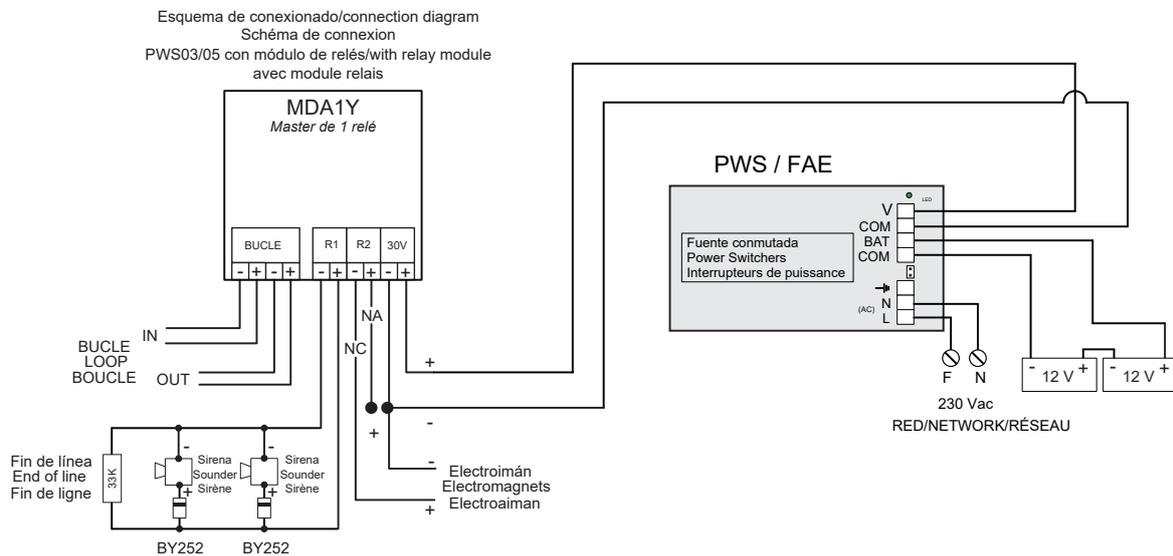

TECHNICAL FEATURES

Supply	230V/AC 50Hz	Humidity	20-95%RH
Output voltage	30V/DC	Temperature	-10°C a +50°C
Standby consumption	100mA	Dimensions	424x330x160mm (with cover)
Output current	FAE03: 3A / FAE05: 5A	IP protection	IP30
Battery charger	Yes		