



SIR24B



SIR24BL



SIR24B+BSLC



SIR24BC

SIR24B / SIR24BL SIR24B+BSLC SIR24C

INDOOR AND OUTDOOR SOUNDERS


Indoor and outdoor sounders for fire protection installations

Series of indoor and outdoor sounders to be connected directly to the sounder output of the control panels or relay modules.


FEATURES

SOUNDER SIR24B, SIR24BL, SIR24BZA and BSLC

- Indoor and outdoor sounder made of red ABS.
- Great sound level. Low consumption.
- 32 selectable tones. Volume control.
- Automatic synchronization.
- SIR24B: Sounder.
- SIR24C: Sounder with light, certified EN54-23.
- SIR24BL: Sounder with light.
- SIR24BZA: Sounder with high base.
- BSLC: Base with light, certified EN54-23.
- All sounders have a diode incorporated.

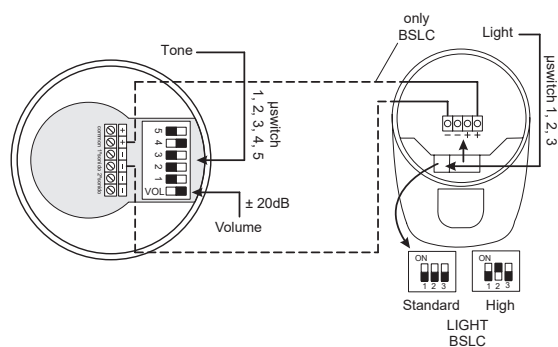

SOUNDER SIR24B + BSLC

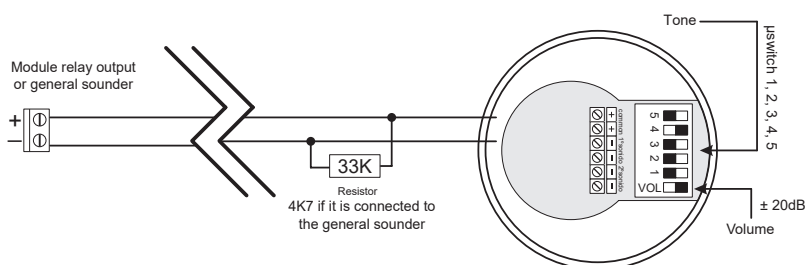

SOUNDER SIR24B, SIR24BL and SIR24BZA

TECHNICAL FEATURES

Voltage range	9-28Vdc	Dimensions	Ø95x91mm
Consumption using tone 3	at 24Vdc 15mA (SIR24B & SIR24BL)		Ø95x107mm (SIR24BL/SIR24BZA)
Consumption using tone 7	49mA (SIR24C)		Ø95x95x135mm (SIR24BL+BSLC)
Cons. tone 3 / 0,5Hz / high power	at 24Vdc 32mA (SIR24B+BSLC)	IP protection	Ø100X98mm (SIR24C)
Output volume	at 24Vdc 102dB (A) (tone 3)		IP54 (SIR24B)
	SIR24C 107dB (tone 23)		IP65 (SIR24BL)
Operative temperature	-25°C α +70°C		IP65 (SIR24BZA)
			IP65 (SIR24B+BSLC)
			IP21C (SIR24C low base)
			IP65 (SIR24C high base)