



PUCAR

RESETTABLE MANUAL CALL POINT



Addressable resettable alarm call point certified EN 54-11

Manual call point for the conventional fire detection system.

It has an indicator of action (red led) that illuminates in case of be manually operated (alarm).

FEATURES

- Resettable call point by pushing yellow button on the front side.
- Transparent protect or cover to avoid accidental false alarms.
- Immediate visual recognition of alarm status by the permanent activation of the LED, and the trigger of
- The yellow tab on the lower side of the activation face.
- According to EN 54-11 and CE mark according the European Regulation of Construction Products (UE) N° 2024/3110.

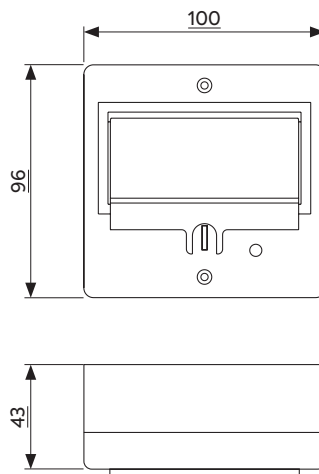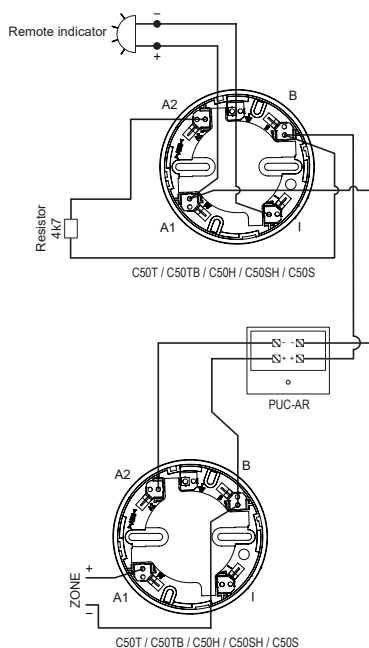

TECHNICAL FEATURES

Supply	24-35V with polarity	Humidity	20 - 95%RH
Standby consumption	0mA	Temperature	-10°C - +50°C
Alarm consumption	35mA	Standard	EN 54-11
Activation signal	Red led	IP protection	IP50
Remote indicator output	No		