



# Voice alarm devices

## SIR24SC / SIR24SC+SIR24SLC



Device that activates a voice message with sound of fire alarm. The message is selectable from its internal list. They have a diode incorporated.

### A. SIR24SC and SIR24SC+SIR24SLC:

- Voltage:  $18 \div 28$  Vdc.
- Consumption:  $4 \div 8$  mA.
- Sound: 90/100 dB selectable.
- Several selectable alarm tones.
- Temperature:  $-10^{\circ}\text{C}$  a  $55^{\circ}\text{C}$ .
- Protection: IP21C.
- Color: red.
- Dimensions: 106 x 106 x 91mm.

### B. SIR24SC + SIR24SLC:

Set alarm voice with bright warning based device.

- Certified EN54-23.
- W 2,4 - 7,5.
- Consumption:  $18 \div 28$  mA.
- 1 Hz (0,5 Hz selectable).

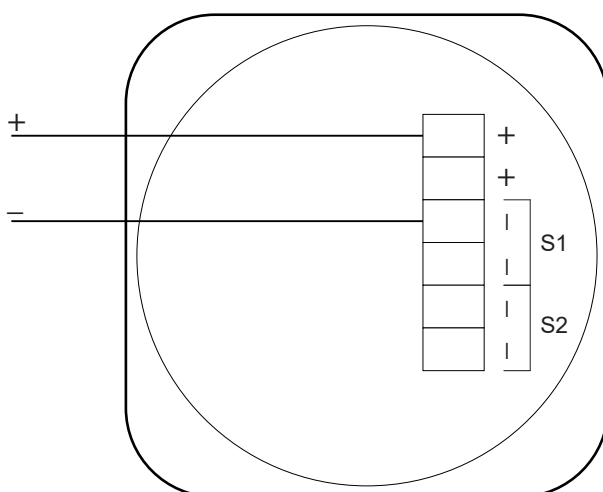


DIAGRAM FOR SIR24SC