COMPLEMENTS



SIR24B



SIR24BL



SIRENCL / SIRENCB



SIR24B+BSLC



SIR24C



SIRENC

SIR24B / SIR24BL
SIR24B+BSLC
SIR24C
SIRENC / SIRENCL
SIRENCB

INDOOR AND OUTDOOR SOUNDERS


Indoor and outdoor sounders for fire protection installations

Series of indoor and outdoor sounders to be connected directly to the sounder output of the control panels or relay modules.


FEATURES

SIRENA SIR24B, SIR24BL, SIR24BZA, BSLC, SIRENC, SIRENCL and SIRENCB


- Indoor and outdoor sounder made of red ABS.
- Great sound level. Low consumption.
- Certified EN54-3.
- 32 selectable tones. Volume control.
- SIR24B: Sounder.
- SIR24C: Sounder with light, certified EN54-23.
- SIR24BL: Sounder with light.
- SIR24BZA: Sounder with high base.
- BSLC: Base with light, certified EN54-23.
- SIRENC: Sounder.
- SIRENCL: Sounder with light, certified EN54-23.
- SIRENCB: Sounder with light.
- All sounders have a diode incorporated.

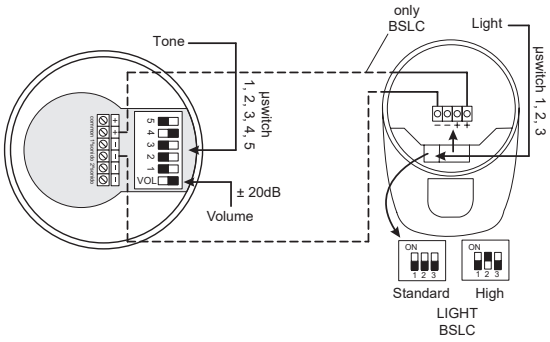

SIR24B + BSLC SOUNDER

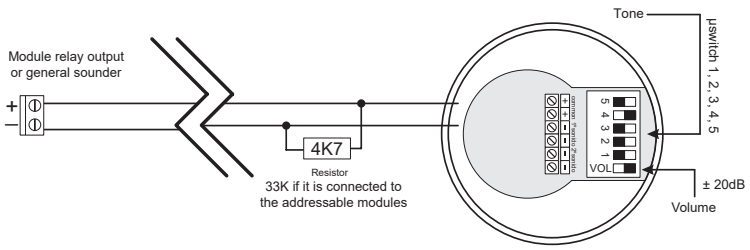

SIR24B, SIR24BL Y SIR24BZA SOUNDER

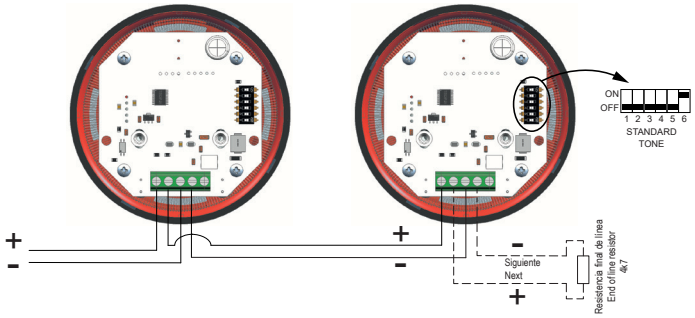

SIRENC - SIRENCL - SIRENCB SOUNDER

TECHNICAL FEATURES			
Supply		SIR24BL / SIR24BZA	Ø95x107mm
SIR24B / SIR24BL / SIR24B+BSLC	9-28Vdc	SIR24B + BSLC	Ø95x95x135mm
SIR24C	24-29Vdc	SIR24C	Ø100x98mm
SIRENC / SIRENCL	12-30Vdc	SIRENC / SIRENCL / SIRENCB	Ø92x78mm
Consumption		**IP protection**	
SIR24B / SIR24BL (tone 3)	15mA - 102dB - 24Vdc	SIR24B	IP54
BSLC	10-25mA - W2,5-2,5/7,5 - 24Vdc	SIR24BL / SIR24BZA	IP65
SIR24C (tone 2)	25mA - 102dB - 24Vdc Coverage 0	SIR24B + BSLC	IP65
SIRENC	25-35mA - 24Vdc	SIR24C (low base)	IP21C
SIRENCL	45-65mA - 24Vdc - W2,4-1,2/W3,2-6,8	SIR24C (high base)	IP65C
SIRENCB	10-26mA - 24Vdc - >4cd	SIRENC / SIRENCL / SIRENCB	IP65
Dimensions			
SIR24B	Ø95x91mm		

Compositor Wagner, 8 | P.I. Can Jardí | 08191 Rubí | Barcelona | (+34) 935 862 690 | cofem@cofem.com | www.cofem.com